




Modular Range with Push Pad



Technical Drawings

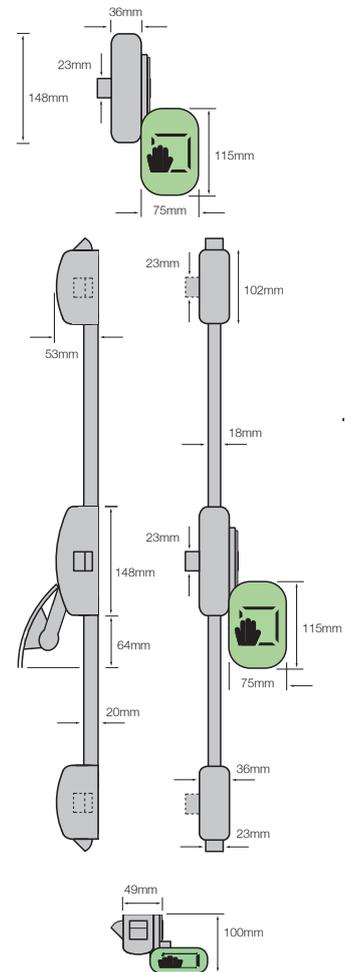

Technical drawings applicable to PH352, PH356, PH358



All the devices of Emergency Exit Hardware (with push pad) have been tested and certified to: EN 179:2008 (Classification: 3-7-7-B-1-4-4-2-B-A)

Strand Antipanic Modular Push Pad Range

- The push pad emergency exit range comprises of modular components together with a push pad
- The range offers a large degree of flexibility and can provide 1, 2 and 3 point latches (with horizontal or side entry Pullman latches) and 2 or 3 point bolts (with vertical pullman latches).
- Suitable for offices and buildings where people are familiar with the exits and hardware therefore a panic situation is unlikely to develop

Application

- Supplied with striker plates for timber doors
- Strikers also available for PVC-U, Aluminium and Steel doors (Please specify when ordering)

Dogging facility:

Dogging should not be used on the fire/smoke door assemblies

- The modular range is available with a dogging or hold-back facility
- Can only be used on escape doors
- If required specify when ordering

Microswitch

- The modular Push Pad range can be provided with a microswitch contained in the operating mechanism.
- If required please specify at the time of ordering.

Outside access

- Optional outside access devices with lever handle or knob to provide entry from the outside (See page 14 for further information)



Finishes

Powder coated finishes

Silver EPS (20)
Black EPB (01)
White EPW (25)

Plated finishes


Satin Stainless Steel Plated SSSP (44)
Polished Brass Plated BP (43)*
Polished Stainless Steel Plated PSSP (55)*

Touchclean™ antibacterial coating available to special order


***Various other RAL colours and plated finishes are available on request.**

Please contact us to enquire

PH352 Single Push Pad Latch

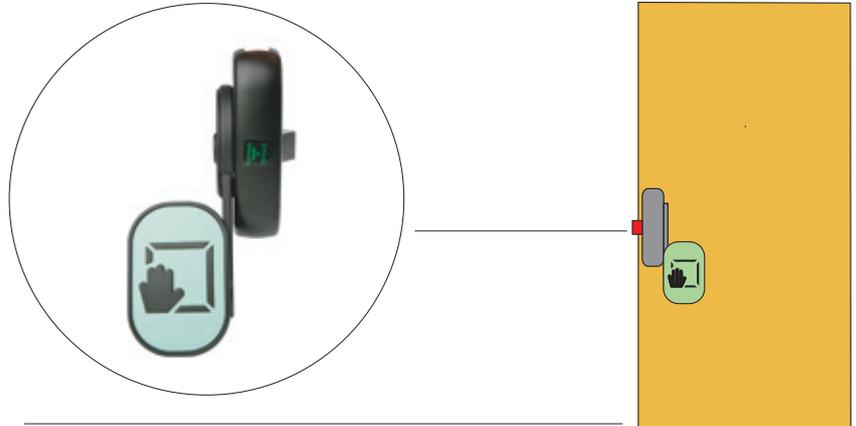

PH356 3 Point Push Pad Bolt

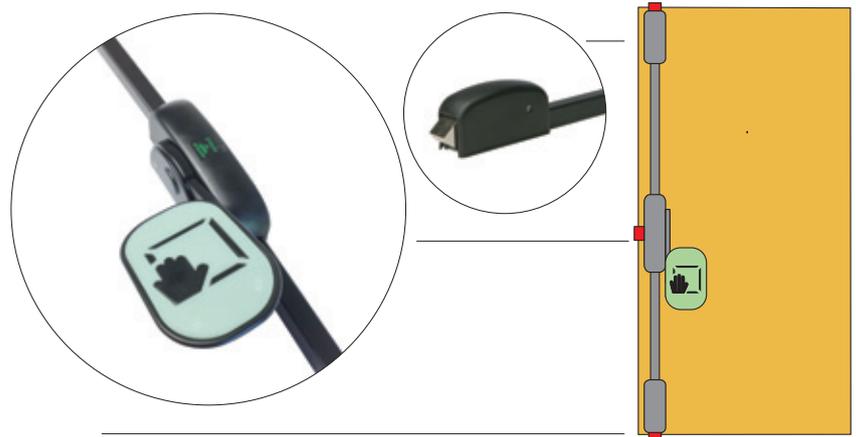

PH358 3 Point Push Pad Latch

